

## SYSTEM REQUIREMENTS

DoorBird IP Video Door Station D10x/D11x/D21x-Series.  
Onna Device (ONNA L)

## ADDITIONAL INFORMATION

The following guide will take you through the steps of setting up a DoorBird IP Video Door Station in connection with Onna Device. Please make sure that the Onna device receives an IP address and is connected to the same local network of your DoorBird IP Video Door Station. Please also make sure that your DoorBird is online, using this service: <https://www.doorbird.com/checkonline>

The local IP address of your DoorBird is available from the same page.

**Note on video functionality:** Onna does not itself handle video, but instead sets up a direct video connection between the devices used. Please make sure the Onna Device you plan to use with your DoorBird IP Video Door Station is set up for video.


## 1. SETTING UP THE ONNA DEVICE

1. Connect Onna device to power supply and LAN connection to local network.


**Note:** You can see IP details on the Onna device-->Settings-->Information

2. Open the Onna Configurator software on the PC/Laptop.


3. In About, select the preferred language and Onna model. Enter the IP details in the settings.

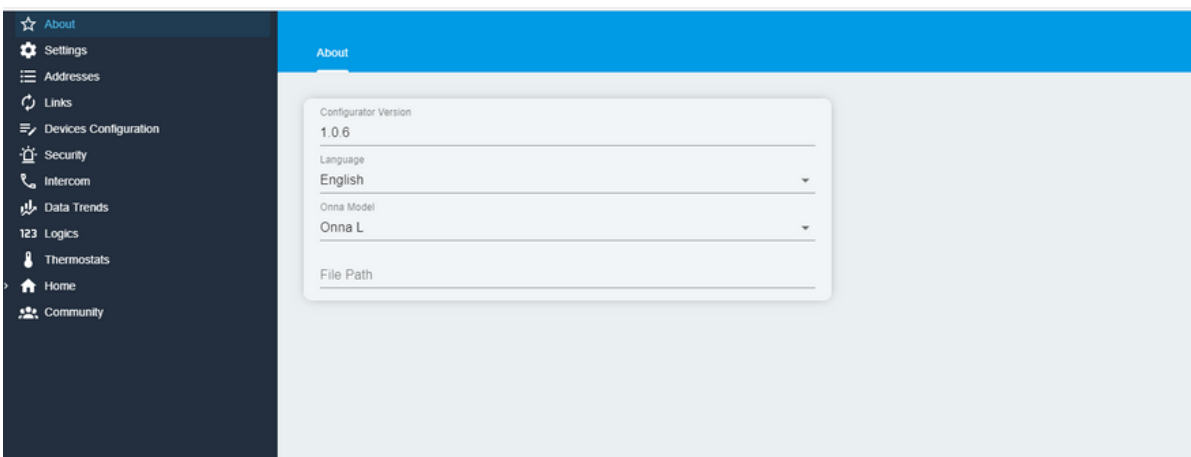

4. Click READ CONFIGURATION. After receiving successful Configuration

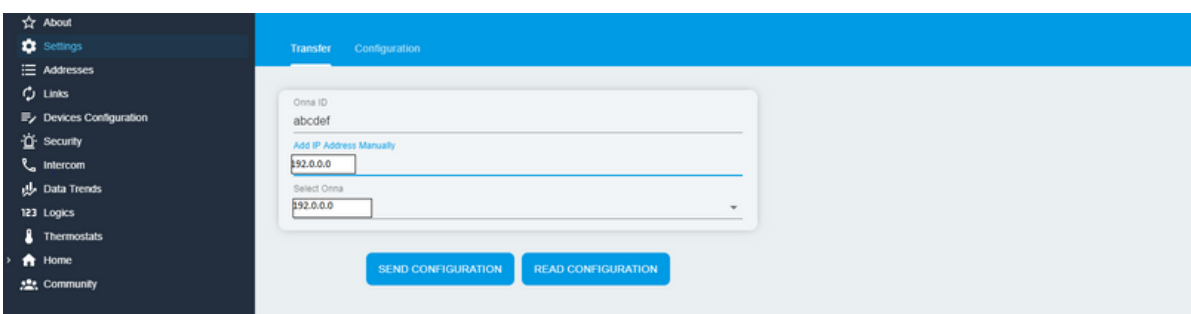



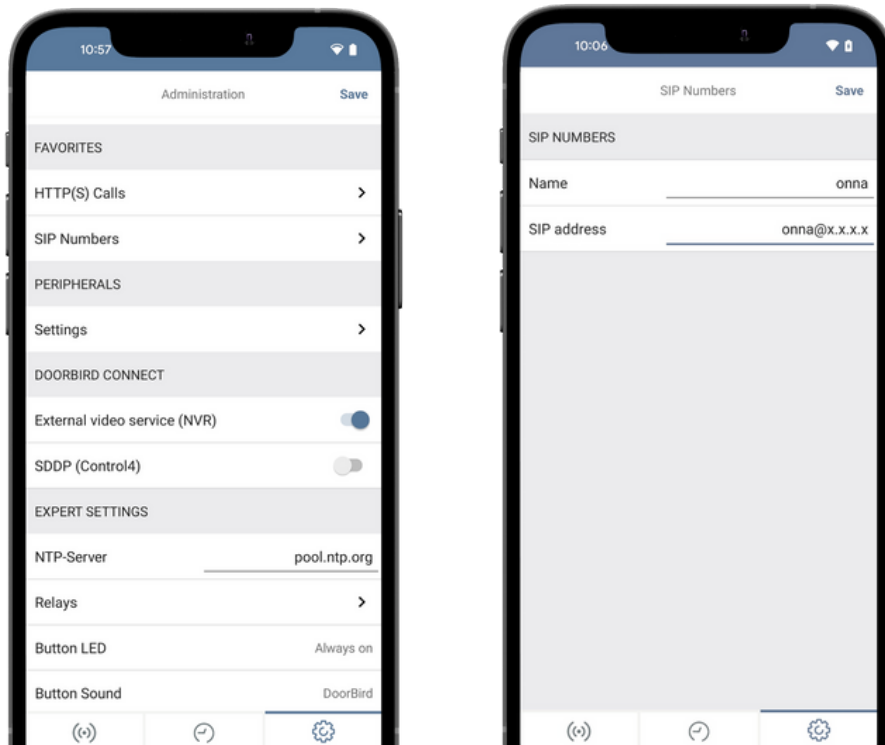


5. In the subsequent screen, enter an arbitrary name in the "Name" field, e.g., "onna". For the SIP address, enter the IP address of your Onna device and SIP address as e.g., onna@x.x.x.x.

For calls from the DoorBird IP Video Door Station to be forwarded to the Onna device, so schedule for doorbell needs to be properly set up. Depending on the model of the DoorBird IP Video Door Station, choose one of the following options

A) For devices with single doorbell (e.g., D10xx, etc.) in the administration area under "schedule for doorbell" from the settings menu. Select the appropriate button and tap "Schedule for actions". From this screen, tap the bell symbol in the upper left corner, choose "SIP call" and fill out the schedule per your requirements.

B) For devices outfitted with a keypad (e.g., D21xx) in the administration area under "Keypad" in the settings menu. Select the appropriate key combination and go to "Schedule for actions". From this screen, tap the bell symbol in the upper left corner, choose "SIP call" and fill out the schedule per your requirements.

C) For all devices outfitted with two doorbells (e.g., D11xx) in the administration area under "schedule for doorbell 1 or 2" in the settings menu. Select the appropriate key combination and go to "Schedule for actions". From this screen, tap the bell symbol in the upper left corner, choose "SIP call" and fill out the schedule per your requirement

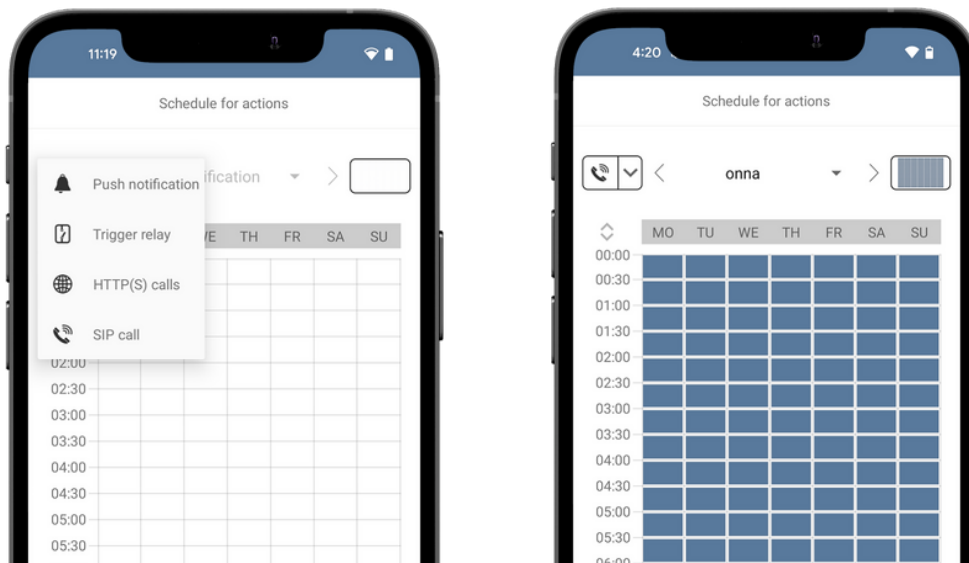

**Hint:** by tapping the button in the upper right corner it is possible to fill or empty the entire schedule

3. Return to the main administration area and save the settings. Wait for about five minutes for the new settings to take place.

## FIRMWARE INFORMATION

This manual was tested using the following versions:

### 1.ONNA

Hardware device series ONNA L

Software Version:1.0.6.3

Hardware Version: 1.0.0

### 2.Door Bird IP Video Door Station:

Hardware device series: D21DKH-V2A

Software Version:000136

Hardware device series: D1102FV

Software Version:000136

Hardware device series: D101S

Software Version:000136