

## SYSTEM REQUIREMENTS

- DoorBird IP Video Door Station D10x/D20x/D21x-Series
- Avycon HN5xx-Series Network Video Recorder

## ADDITIONAL INFORMATION

The following guide will take you through the steps of setting up a DoorBird IP Video Door Station in connection with an Avycon Network Video Recorder.

Please make sure that the Avycon Network Video Recorder receives an IP address and is connected to the same local network your DoorBird IP Video Door Station is connected to. Please also make sure that your DoorBird is online, using this service:



<https://www.doorbird.com/checkonline>

The local IP address of your DoorBird is available from the same page.

## 1. SETTING UP THE DOORBIRD IP VIDEO DOOR STATION

For the DoorBird IP Video Door Station to be properly recognized by the Avycon Network Video Recorder, the “Onvif”-setting of the DoorBird IP Video Door Station must be activated.

1. Open the DoorBird App and log into the administration area under “**Settings → Administration**” using the administrator user and password credentials from the “**DIGITAL PASSPORT**” document that was shipped with your DoorBird IP Video Door Station.
2. Find the “**Onvif**”-Toggle under “**DOORBIRD CONNECT**” from the main menu and switch it on.

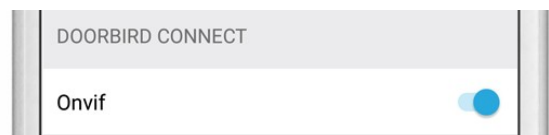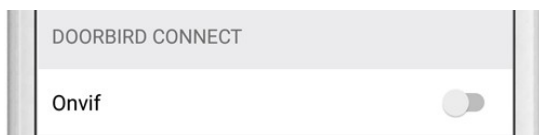

## 2. SETTING UP THE AVYCON NETWORK VIDEO RECORDER

To make use of the DoorBird IP Video Door Station’s camera, it needs to be added and configured within the Avycon Web Client.

1. Make sure the Avycon Network Video Recorder is running and connected to your local network.
2. Open the Avycon Web Client by typing the IP address of the Avycon Network Video Recorder into the address field of your browser.




Enter Username


Enter Password

Login

- Log into the Avycon Web Client using your admin credentials for the Avycon Network Video Recorder.
- On the main screen, click on **“Function Panel”** to get to the settings screen.

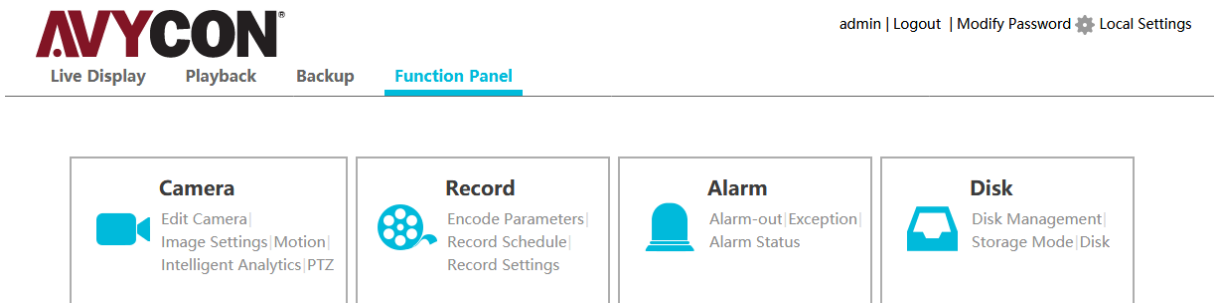

- Click on **“Camera”**, and on the subsequent screen click on **“Add camera”**, located in the menu on the left.
- From the list of preconfigured cameras, find the one with the IP address of your DoorBird IP Video Door Station and click on it, then click **“Add”**.
- On returning to the Edit Camera screen, you should now see an entry with the IP address of your DoorBird IP Video Door Station, its status most likely **“Offline”**.

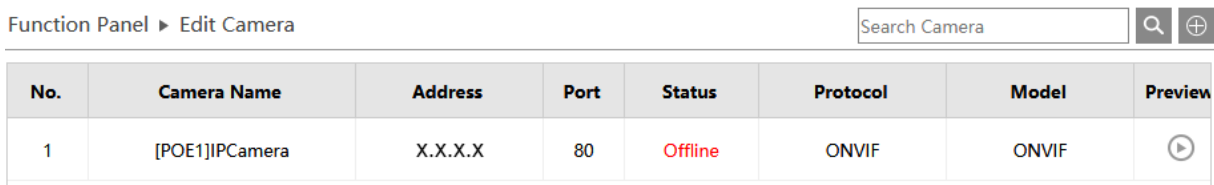

- Scroll to the right and click on the **“Edit”**-symbol to bring up the camera settings.

Model	Preview	Edit	Delete
ONVIF			

- Here, set the **“Camera Name”** to your preference, e.g. **“DoorBird”**. Change the **“Username”** to the **“App user”** from the **“DIGITAL PASSPORT”** document that was shipped with your DoorBird IP Video Door Station. Activate **“Modify Password”** and enter the password associated with the **“App user”**. Close the window by clicking **“OK”**.

**Edit Camera** ✕

Camera Name	<input type="text" value="DoorBird"/>
Address	<input type="text" value="1.1.1.1"/> <input type="checkbox"/> Domain
Port	<input type="text" value="80"/>
Protocol	<input type="text" value="ONVIF"/>
Model	<input type="text" value="ONVIF"/>
Username	<input type="text" value="user0001"/>
Modify Password <input checked="" type="checkbox"/>	<input type="password" value="••••••••"/>

10. After a couple of seconds the status of your DoorBird camera should change from **“Offline”** to **“Online”**. If not, please make sure the **“Onvif”**-setting is active inside your DoorBird App and that the **“App user”** and password were entered correctly.

For questions and problems regarding the product **“Avycon Network Video Recorder”** please contact the manufacturer online: <https://avycon.com/technical-support/>

For questions and problems regarding our devices (DoorBird IP Video Door Station) please use the contact for to get In touch with our technical support: <https://www.doorbird.com/contact>