













D2101V

IP VIDEO DOOR STATION

For single-family houses and commercial buildings with 1 unit 1 Call Button



ANSWER YOUR DOOR ANYWHERE.

ADVANTAGES

HOW DOES IT WORK?

Imagine, you are not at home and your children have locked themselves out or the courier wants to deliver a parcel. With DoorBird this is no longer a problem. Every time someone rings the doorbell you will get a push notification on your smartphone or tablet. Via the DoorBird App you are not only able to talk to the visitor but also see them live in HD quality. You will never miss a visitor again. With DoorBird you are on the move and yet at home, even if a burglar rings at the door to check if someone is at home.

SMART HOME STARTS AT THE FRONT DOOR

DoorBird is the smart solution for your house entrance. Simply connect your DoorBird IP Video Door Station to your smartphone and talk to your visitor – anywhere you are. The IP Video Door Station can be used as a standalone unit or can be integrated into an existing Smart Home platform. Even existing classic installations such as an electric door opener can still be used and controlled via the DoorBird App.

QUALITY MADE IN GERMANY

All DoorBird products are designed, developed and produced by Bird Home Automation GmbH in Berlin, Germany. We manufacture all products with the greatest care and precision, and deliver them to our customers all over the world.



Open API

 Local interface for integration with third-party systems and SIP



Video and audio call

 On smartphones, tablets (iOS, Android), IP and landline phones (SIP)



Smart Transmission Mode (STM)

 Real-time audio / video communication, optimized for mobile devices via WiFi, 3G, 4G, 5G



Smart Home & NVR compatible

 Control4, Loxone, Crestron, Synology, AVM FRITZ!Fon, URC, QNAP, RTI, ELAN, Fibaro, Bang & Olufsen and others





Automatic door buzzer

· For use in medical offices and office environments



HD HDTV Video

· Ultra wide-angle, hemispheric lens, 180°

Motion sensor with 4D technology

· Distance up to 10 m adjustable via App (interval: 1 m)



Free visitor history

· Store still images for free, optional video recording available



Light sensor

· For night vision mode



Call button

· With backlit nameplate



Individual action schedules, e.g.:

- · RFID card "abc" has only access on Wednesday from 9 am until 11 am
- · 4D motion sensor switches on external lamp between 9 pm and 6 am



Microphone

· Clear voice transmission



Easy connection to the network

· Connection via a network cable or a bell wire (with a 2-wire converter) to a RJ45 socket (PoE, network data)



Geofencing

· Automatic door and gate opening when returning home



Noise reduction and echo cancellation (AEC, ANR)



Two freely configurable bi-stable switching relays

- · Two doors or gates can be controlled via App
- · Status configurable via App: temporary or permanent circuit

Night vision IR

· With 12 Infrared LEDs





RFID reader

· Configurable remotely via App (e.g. time frame)





Front panel material thickness: 3.0 mm (0.12 in)

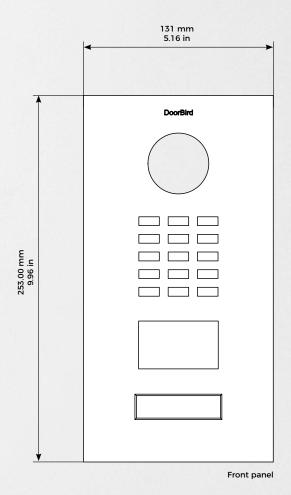

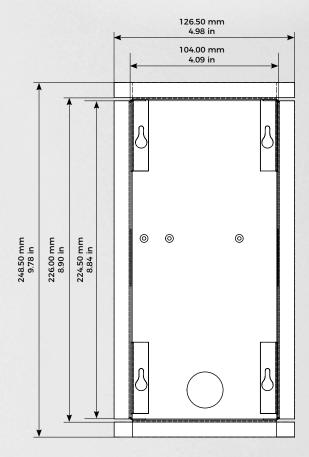

Flush-mounting housing (backbox)

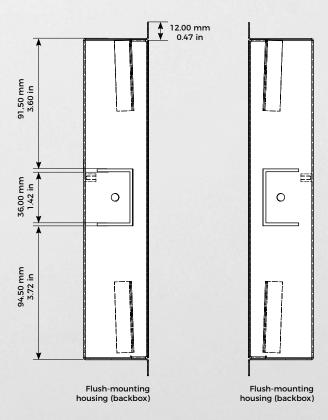



TECHNICAL SPECIFICATIONS



	GENERAL		VIDEO	
	Front panel	3 mm (0.12 in) Available in over 50 RAL colors and surfaces including stainless steel V2A / V4A (see material guide)	Camera Lens	
	Mounting housing (backbox)	Stainless steel	Night-vision	
	Mounting type	Flush-mounted, surface-mounting housing sold separately	AUDIO	
	Call button	Illuminated	Audio components	
	Nameplate	Plastic. Engravable metal nameplate sold separately, see www.doorbird.com/buy	Audio streaming	
	Power supply	15 V DC (max. 15 W) or Power over Ethernet (PoE 802.3af Mode-A)	NETWORK	
	Weight	1577 g	Ethernet	
		RJ45, for LAN/PoE Bistable latching relay #1, max. 24 V DC/AC, 1 Ampere, e.g. for electric door opener Bistable latching relay #2, max. 24 V DC/AC,	Supported protocols MOTION SENSOR	
	Connectors	1 Ampere, e.g. for electric door opener	Туре	
		 External input for external door opener button 	Detection angle	
		 15 V DC input (+, -), max. 15 W Relays can be expanded / detached with DoorBird I/O Door Controller 	Range	
	Weather-proof	Yes, IP65	Technology	
	Approvals	IP65, CE, FCC, IC, RoHS, IK08, REACH, IEC/EN 62368, IEC/EN 62471		
	Dimensions	253 x 131 x 48,75 mm (H x W x D) 9.96 x 5.16 x 1.92 in (H x W x D)	Configuration	
	Operating conditions	-25 to +55°C / -13 to 131°F Humidity 10 to 85 % RH (non condensing)		
		1x Main Electrical Unit	RFID	
		1x Front panel 1x Flush-mounting housing (backbox)	Туре	
		1x Power supply unit (mains adaptor) with four	Standard	
		country-specific outlet adaptors	Frequency	
	Scope of delivery	(110 - 240 V AC to 15 V DC) 1x RFID key fob	Range	
		1x Screwdriver	Antenna	
		1x Quickstart guide with Digital Passport		
		1x Installation manual	Compatible Transponder	
		1x Small parts	Hansponder	
	Warranty	see www.doorbird.com/warranty		
	CURRENT SYSTEM RE	CURRENT SYSTEM REQUIREMENTS		
		Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet	Configuration	
	System requirements	Internet: High-Speed Landline Broadband	INTEGRATED WIRELES	
		Internet connection, DSL, cable or fiber optic, no socks or proxy server	RFID	
			Sensor	
		Network: Ethernet Network, with DHCP	THIRD-PARTY INTEGR	
	Recommended installation height	Camera lens should be at a min. height of 145 cm (57 in). Before the installation please determine your optimal installation height.	Partnerintegrations	
			API	
		······································	Simultaneous video streams	

VIDEO		
Camera	HDTV 720p, dynamic (VGA - HDTV)	
Lens	High-end ultra wide-angle hemispheric lens 180° (D), 140° (H), 100° (V), straightened, IR-capable	
Night-vision	Yes, light sensor, automatic IR-cut filter, 12 Infrared LEDs (850 nm)	
AUDIO		
Audio components	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC)	
Audio streaming	Two-way, full duplex	
NETWORK		
Ethernet	RJ45 jack, PoE 802.3af Mode-A, 10/100 Base-T	
Supported protocols	HTTP, HTTPS, SSL/TLS, Bonjour, DNS, RTSP, RTF TCP, UDP, RTCP, ICMP, DHCP, ARP, SIP, DTMF (RTP [RFC-2833], SIP INFO [RFC-2976]), STM	
MOTION SENSOR		
Туре	Active	
Detection angle	54° (H), 70° (V)	
Range	1 - 10 m (3.3 - 32.9 ft), depends on environment, configurable in 1 m (3.3 ft) steps.	
Technology	4D. Based on multiple integrated sensors and algorithms, e.g. Radio Frequency Energy (RFE)	
Configuration	Via App, e.g. Range (1 - 10 m / 3.3 - 32.9 ft) Movement direction (coming, leaving, both) Individual events (e.g. switch a relay, push notification, SIP call [audio/video], HTTP(s) notification) Individual schedules	
RFID		
Туре	Active Reader Passive Tag (ARPT) system	
Standard		
Staridard	ISO/IEC 18000-2:2009 Part 2, EM4100, EM4102	
Frequency	ISO/IEC 18000-2:2009 Part 2, EM4100, EM4102 125 KHz	
Frequency	125 KHz	
Frequency Range	125 KHz 0 - 3 cm, depends on environment	
Frequency Range Antenna Compatible	125 KHz 0 - 3 cm, depends on environment Internal RFID key fobs, sold separately,	
Frequency Range Antenna Compatible	125 KHz 0 - 3 cm, depends on environment Internal RFID key fobs, sold separately, see www.doorbird.com/buy	
Frequency Range Antenna Compatible Transponder	125 KHz 0 - 3 cm, depends on environment Internal RFID key fobs, sold separately, see www.doorbird.com/buy Up to 100 tags manageable Via App, e.g. • Tag (add, delete) • Individual events (e.g. switch a relay, SIP call [audio/video], HTTP(s) notification) • Individual schedules	
Frequency Range Antenna Compatible Transponder Configuration	125 KHz 0 - 3 cm, depends on environment Internal RFID key fobs, sold separately, see www.doorbird.com/buy Up to 100 tags manageable Via App, e.g. • Tag (add, delete) • Individual events (e.g. switch a relay, SIP call [audio/video], HTTP(s) notification) • Individual schedules	
Frequency Range Antenna Compatible Transponder Configuration	125 KHz 0 - 3 cm, depends on environment Internal RFID key fobs, sold separately, see www.doorbird.com/buy Up to 100 tags manageable Via App. e.g. • Tag (add, delete) • Individual events (e.g. switch a relay, SIP call [audio/video], HTTP(s) notification) • Individual schedules	
Frequency Range Antenna Compatible Transponder Configuration INTEGRATED WIRELE RFID Sensor	125 KHz 0 - 3 cm, depends on environment Internal RFID key fobs, sold separately, see www.doorbird.com/buy Up to 100 tags manageable Via App, e.g. • Tag (add, delete) • Individual events (e.g. switch a relay, SIP call [audio/video], HTTP(s) notification) • Individual schedules ESS MODULES 125 KHz	
Frequency Range Antenna Compatible Transponder Configuration INTEGRATED WIRELE RFID Sensor	125 KHz 0 - 3 cm, depends on environment Internal RFID key fobs, sold separately, see www.doorbird.com/buy Up to 100 tags manageable Via App, e.g Tag (add, delete) - Individual events (e.g. switch a relay, SIP call [audio/video], HTTP(s) notification) - Individual schedules ESS MODULES 125 KHz 24 GHz, can be disabled	
Frequency Range Antenna Compatible Transponder Configuration INTEGRATED WIRELE RFID Sensor THIRD-PARTY INTEGRATED	125 KHz 0 - 3 cm, depends on environment Internal RFID key fobs, sold separately, see www.doorbird.com/buy Up to 100 tags manageable Via App, e.g. • Tag (add, delete) • Individual events (e.g. switch a relay, SIP call [audio/video], HTTP(s) notification) • Individual schedules ESS MODULES 125 KHz 24 GHz, can be disabled RATION (DOORBIRD CONNECT)	
Frequency Range Antenna Compatible Transponder Configuration INTEGRATED WIRELE RFID Sensor THIRD-PARTY INTEGRATE Partnerintegrations	125 KHz 0 - 3 cm, depends on environment Internal RFID key fobs, sold separately, see www.doorbird.com/buy Up to 100 tags manageable Via App, e.g Tag (add, delete) - Individual events (e.g. switch a relay, SIP call [audio/video], HTTP(s) notification) - Individual schedules ESS MODULES 125 KHz 24 GHz, can be disabled RATION (DOORBIRD CONNECT) see www.doorbird.com/connect	
Frequency Range Antenna Compatible Transponder Configuration INTEGRATED WIRELE RFID Sensor THIRD-PARTY INTEGE Partnerintegrations API Simultaneous video	125 KHz 0 - 3 cm, depends on environment Internal RFID key fobs, sold separately, see www.doorbird.com/buy Up to 100 tags manageable Via App, e.g. • Tag (add, delete) • Individual events (e.g. switch a relay, SIP call [audio/video], HTTP(s) notification) • Individual schedules ESS MODULES 125 KHz 24 GHz, can be disabled RATION (DOORBIRD CONNECT) see www.doorbird.com/connect see www.doorbird.com/api One, for event-based and continuous recording	

Special remarks: Assembly requires professional skills or a technician.



This data sheet is valid for the following EANs (discontinued on August 1, 2021):

4260423860414	4260423862074	4260423862210	4260423862357
4260423861411	4260423862081	4260423862227	4260423862364
4260423860742	4260423862098	4260423862234	4260423862371
4260423860933	4260423862104	4260423862241	4260423862388
4260423860940	4260423862746	4260423862258	4260423862395
4260423860957	4260423862128	4260423862265	4260423862401
4260423860964	4260423862135	4260423862760	4260423862418
4260423860971	4260423862142	4260423862777	4260423862425
4260423867222	4260423862159	4260423862296	4260423862432
4260423862029	4260423862166	4260423862302	4260423862449
4260423862036	4260423862173	4260423862319	4260423862456
4260423862043	4260423862180	4260423862326	4260423862463
4260423862050	4260423862203	4260423862333	4260423862470
4260423862067	4260423862753	4260423862340	