

SYSTEM REQUIREMENTS

- DoorBird IP Video Door Station D10x/D20x/D21x-Series or DoorBird IP Upgrade D301A
- QNAP Network Video Recorder (NVR) or Network-Attached Storage (NAS)

ADDITIONAL INFORMATION

The following guide will take you through the steps of setting up a DoorBird IP Video Door Station in connection with a QNAP Network Video Recorder (NVR) or Network-Attached Storage, referred to simply as "QNAP device" throughout this manual.

Please make sure that the QNAP device receives an IP address and is connected to your network. Please also make sure that your DoorBird IP Video Door Station is online, using this service:

<https://www.doorbird.com/checkonline>

The local IP address of your DoorBird IP Video Door Station is available from the same page.

SETTING UP THE QNAP DEVICE

1. Open the camera configuration of the QNAP device.
2. Add a new camera and in the following window enter the following values (see image below for visual reference):

Camera Brand: **Generic Model**

Camera Model: **Generic JPEG**

HTTP URL: **/bha-api/video.cgi**

Camera Name: **arbitrary, e.g. "DoorBird"**

IP Address: **<IP address of your DoorBird IP Video Door Station>**


Port: **80**

WAN IP Address: **<leave empty>**

Port: **80**

User Name: **user name of DoorBird user, e.g. user0001**

Password: **password associated with the user**

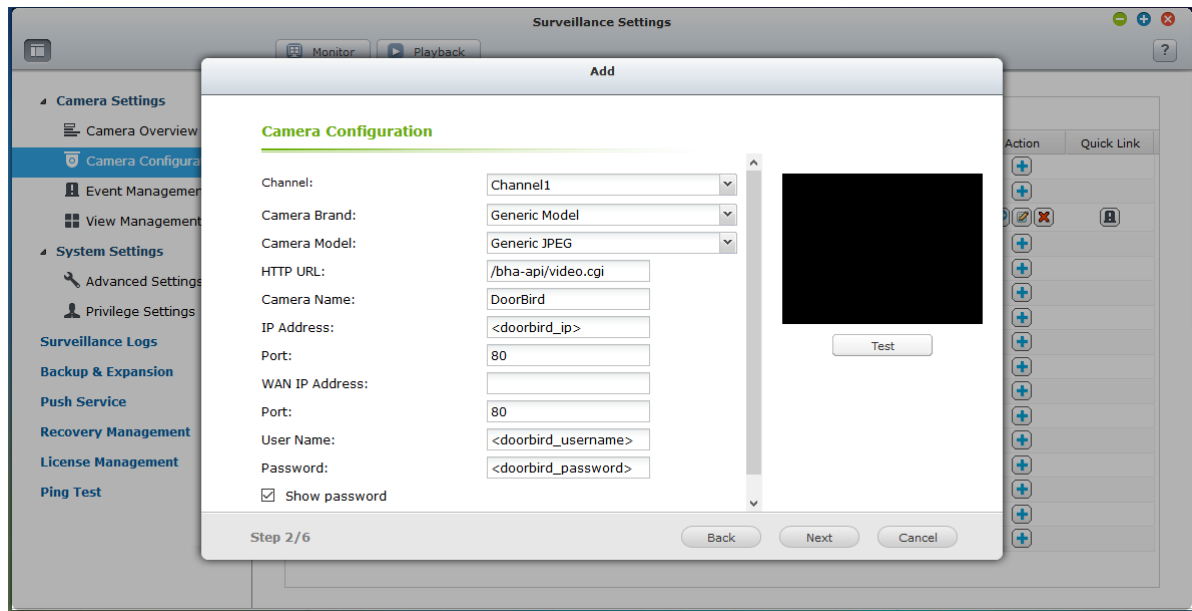

For questions and problems regarding the product “QNAP NAS/NVR” please contact the manufacturer online: <https://www.qnap.com/en/>

For questions and problems regarding our devices (DoorBird IP Video Door Station) please use the contact for to get In touch with our technical support: <https://www.doorbird.com/contact>