

SYSTEM REQUIREMENTS

- DoorBird IP Video Door Station D10x/D20x/D21x-Series or DoorBird IP Upgrade D301A
- Synology Network Video Recorder (NVR) or Network-Attached Storage (NAS)

ADDITIONAL INFORMATION

The following guide will take you through the steps of setting up a DoorBird IP Video Door Station in connection with a Synology Network Video Recorder (NVR) or Network-Attached Storage, referred to simply as "Synology device" throughout this manual.

Please make sure that the Synology device receives an IP address and is connected to your network. Please also make sure that your DoorBird IP Video Door Station is online, using this service:



<https://www.doorbird.com/checkonline>

The local IP address of your DoorBird IP Video Door Station is available from the same page.

1. SETTING UP THE DOORBIRD IP VIDEO DOOR STATION


For the DoorBird IP Video Door Station to be properly recognized by the Synology device, the "Onvif"-setting of the DoorBird IP Video Door Station must be activated.

1. Open the DoorBird App and log into the administration area under "**Settings** → **Administration**" using the administrator user and password credentials from the "**DIGITAL PASSPORT**" document that was shipped with your DoorBird IP Video Door Station.
2. Find the "**Onvif**"-Toggle under "**DOORBIRD CONNECT**" from the main menu and switch it on.

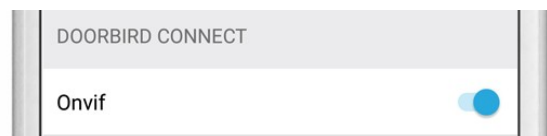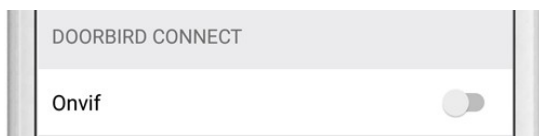


2. SETTING UP THE SYNOLOGY DEVICE

1. Open the Synology web interface by entering the IP address of the Synology device in your browser and enter the "**Surveillance Station**".
2. On the main screen of the "**Surveillance Station**", click on "**IP Camera**".
3. Click "**Add→Add Camera**" to add a new device.

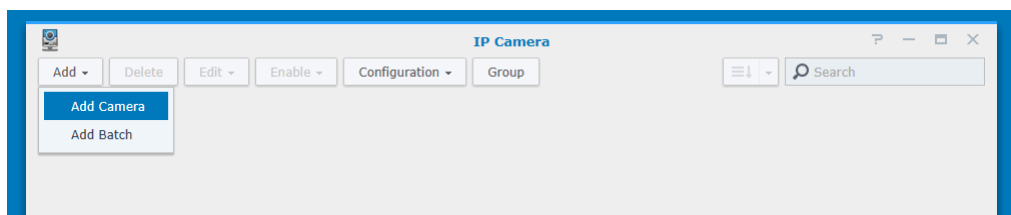

4. On the first page of the wizard, select "**Quick Setup**" and click "**Next**".

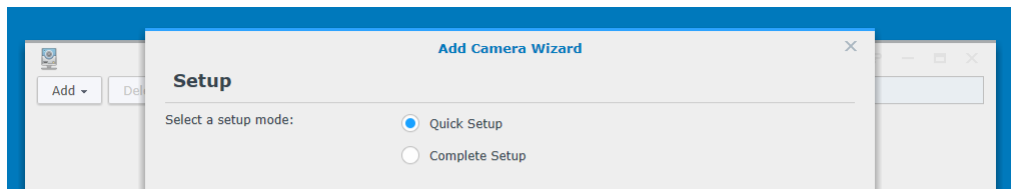

5. Set the device's settings to the following values:

Name: arbitrary, e.g. "DoorBird"


IP Address: <IP address of your DoorBird IP Video Door Station>

Port: 80

Brand: ONVIF

Username: User name of DoorBird user, e.g. user0001

Password: password associated with the user

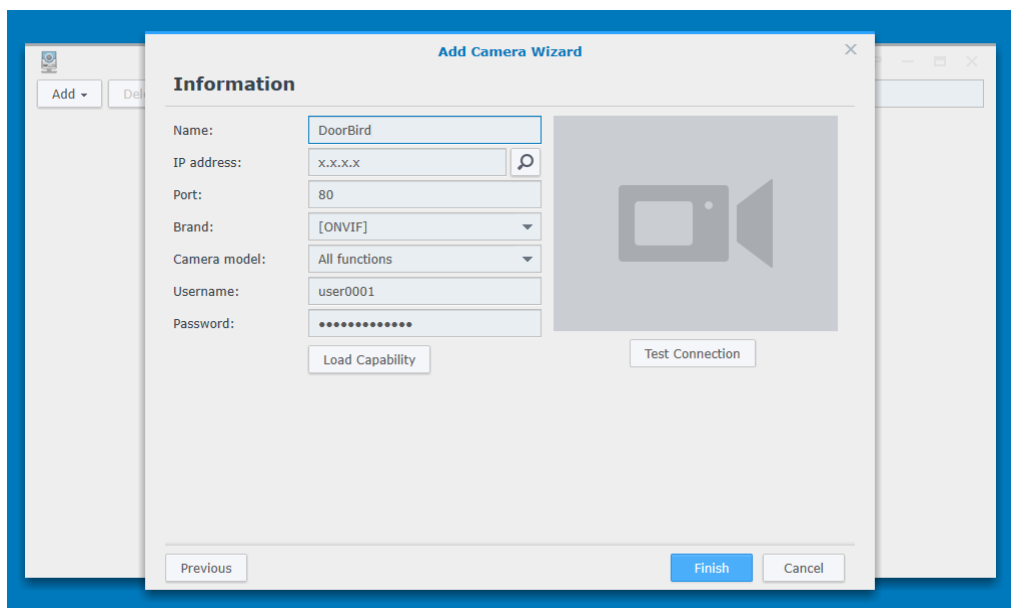

6. Click on "**Load Capability**" to make sure the DoorBird IP Video Door Station is discovered correctly. If all the values were entered correctly, a green check mark should appear. If not, please make sure you entered all the values correctly and try again.

7. Click on "**Test Connection**" to test the video stream of the DoorBird IP Video Door Station. If everything is setup correctly, a green check mark should appear. If not, please make sure your DoorBird IP Video Door Station is active and set up correctly.

8. Click "**Finish**" to complete the setup.

For questions and problems regarding the product "Synology NAS/NVR" please contact the manufacturer online: <https://www.synology.com/en-global/support>

For questions and problems regarding our devices (DoorBird IP Video Door Station) please use the contact for to get In touch with our technical support: <https://www.doorbird.com/contact>