

SYSTEM REQUIREMENTS

- DoorBird IP Video Door Station D10x/D20x/D21x-Series or DoorBird IP Upgrade D301A
- IC Realtime Network Video Recorder

ADDITIONAL INFORMATION

The following guide will take you through the steps of setting up a DoorBird IP Video Door Station in connection with an IC Realtime Network Video Recorder.

Please make sure that the IC Realtime Network Video Recorder receives an IP address and is connected to your network. Please also make sure that your DoorBird IP Video Door Station is online, using this service:



<https://www.doorbird.com/checkonline>

The local IP address of your DoorBird IP Video Door Station is available from the same page.

1. SETTING UP THE DOORBIRD IP VIDEO DOOR STATION


For the DoorBird IP Video Door Station to be properly recognized by the IC Realtime Network Video Recorder, the “Onvif”-setting of the DoorBird IP Video Door Station must be activated.

1. Open the DoorBird App and log into the administration area under “**Settings → Administration**” using the administrator user and password credentials from the “**DIGITAL PASSPORT**” document that was shipped with your DoorBird IP Video Door Station.
2. Find the “**Onvif**”-Toggle under “**DOORBIRD CONNECT**” from the main menu and switch it on.

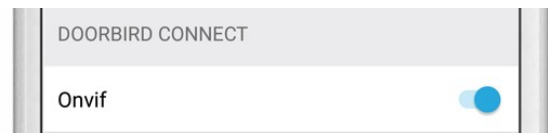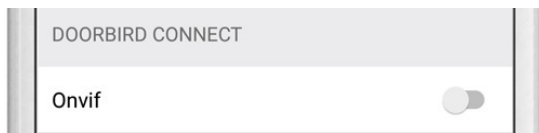

2. SETTING UP THE IC REALTIME NETWORK VIDEO RECORDER

1. From Settings Area of your IC Realtime Network Video Recorder, go to “**Camera → Remote**” to find a list of supported Onvif cameras in your local network.
2. Find your DoorBird IP Video Door Station on the list by its local IP address and add it.
3. Edit the settings for the DoorBird IP Video Door Station by clicking “**modify**” and change the following settings:
 - Username: **user name of DoorBird user, e.g. user0001**
 - Password: **password associated with the user**
4. Leave the remaining settings at their default values (see the following image for visual reference).

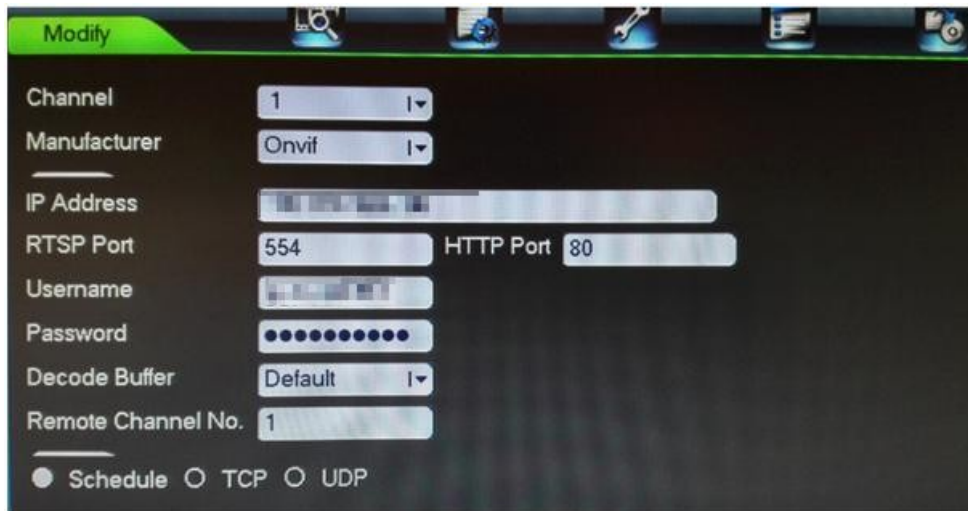

For questions and problems regarding the product “IC Realtime Network Video Recorder” please contact the manufacturer online: <https://www.icrealtime.com/>

For questions and problems regarding our devices (DoorBird IP Video Door Station) please use the contact for to get In touch with our technical support: <https://www.doorbird.com/contact>